

MOCAP[®]

Contents

1. Friction Fit Caps & Plugs



Non-Threaded Design Allows for Easy Placement and Removal to Protect Threads and Fittings

5. Tapered Caps & Plugs



Designed with Slight Taper to Secure Tightly to Protect Threads and Fittings

7. Threaded Caps & Plugs



Designed to Fit a Variety of Standard and Metric Threads, Threaded Ports, Fittings and Assemblies

10. Grips



Round, Flat and Finger Nub Styles for Improved Appearance, Durability and Comfort

11. Pipe & Flange Protection



Caps, Plugs and Push-In Flange Protectors for Use with Pipe, Tubing and Flanges

12. Masking



Caps, Plugs, Tapes and Discs in a Variety of Materials, Shapes, Sizes and Temperature Requirements

16. Miscellaneous Products



Self-Fusing Silicone Tape, Clear Plastic Packaging Tubes, Mesh Netting and Secondary Operations



For Current Info, Material Specifications, Colour Options and Terms & Conditions of Sale, Please Visit:

www.mocap.co.uk +44 (0) 1952 670247 sales@mocap.co.uk



**Hortonwood 35
Telford, Shropshire TF1 7YW**



Friction Fit Caps & Plugs



A Series Round Vinyl Caps

- Sizes to Fit Straight, Metric, BSP & NPT Threads and Fittings
- Use as Thread Protector or End Cap
- Flexible Yet Durable - Won't Split, Tear or Shred
- Printable
- Available in High Temp Formula refer to page 12
- Material: Black Vinyl Additional Colours: ○●●●●●●●●●●



F Series Flat Rectangular Vinyl Caps

- Sizes to Fit 1.0mm x 10.0mm to 12.7mm x 63.5mm
- Caps Feature either a Round End or a Flat End
- Flexible Yet Durable - Won't Split, Tear or Shred
- Printable
- Material: Black Vinyl Additional Colours: ○●●●●●●●●●●



D Series Pull Tab Vinyl Caps

- Sizes to Fit 4.8mm to 31.8mm (.187" to 1.25")
- Flat / Ergonomic Tab for Easy Removal
- Stretches for a Snug Fit, but Won't Split, Tear or Shred
- Available in High Temp Formula refer to page 12
- Material: Black Vinyl Additional Colours: ○●●●●●●●●●●




AHC Series Vinyl Hanger Caps

- Sizes to Fit 13.5mm to 50.8mm (.531" to 2")
- Stretches for a Snug Fit, but Won't Split, Tear or Shred
- Durable
- Material: Black Vinyl Additional Colours: ○●●●●●●●●●●



AS Series Square Vinyl Caps

- Sizes to Fit 10.0mm to 100.0mm (.420" to 3.95")
- Stretches for a Snug Fit, but Won't Split, Tear or Shred
- Durable
- Material: Black Vinyl Additional Colours: ○●●●●●●●●●●

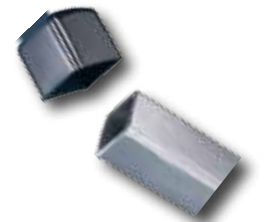

See Website for
Full Size Charts



Friction Fit Caps & Plugs



AHX Series Vinyl Hex Caps

- Sizes to Fit 11.1mm to 19.0mm (7/16" to 3/4")
- Use as Thread Protector or End Cap
- Flexible Yet Durable - Won't Split, Tear or Shred
- Material: Black Vinyl Additional Colours: ○●●●●●●●●●●



AC Series Vinyl Corner Covers

- Sizes to Fit 1.6mm to 15.0mm Thickness
- Prevents Chipping & Breakage During Transport & Storage
- Snug Fit, but Easily Removed
- Material: Red Vinyl Additional Colours: ○●●●●●●●●●●



VCG Series Vinyl Collar Guards

- Sizes to Fit 19.4mm to 27.2mm (.720" to 1.080")
- Prevents Kinking on Consumer and Industrial Hoses
- Flexible Yet Durable - Won't Split, Tear or Shred
- Printable
- Material: Red Vinyl Additional Colours: ○●●●●●●●●●●



2



CMCP Series Vinyl Insertion Plugs

- Sizes to Fit M6 to M34 (1/4" to 1-1/4")
- Wide Flange for Easy Removal
- Flexible Yet Durable - Won't Split, Tear or Shred
- Available in High Temp Formula refer to page 12
- Material: Red Vinyl Additional Colours: ○●●●●●●●●●●



S Series Straight Caps

- Available in Diameters: 3.1mm ID to 25.0mm (1/8" to 1")
- Designed to Cap Outside Diameters
- Snug Fit for Threaded or Non-Threaded Tubes, Rods & Fittings
- Material: Red Low Density Polyethylene



See Website for
Full Size Charts

Friction Fit Caps & Plugs



FCS,FCM, FCBN Series Flanged Caps

- Sizes to Fit Straight, Metric, BSP & NPT Threads and Fittings
- Flanged for Easy Removal
- Use as Thread Protector or End Cap
- Material: Natural Low-Density Polyethylene



FCSL Series Long Flanged Caps

- Available in Diameters: 7.8mm ID to 47.3mm ID (5/16" to 1-7/8")
- Flanged for Easy Removal
- Use as Thread Protector or End Cap
- Material: Red Low-Density Polyethylene



TCS, TCM, TCBSP, TCNPT Series Tear Caps

- Sizes to Fit Straight, Metric, BSP & NPT Threads and Fittings
- Secure Fit Until Removed by Pulling Tab and Breaking Seal
- Use as Shipping Cap, End Cap or Thread Protector
- Material: Red Low-Density Polyethylene



3



MPSC Series Paper Straight Caps

- Sizes to Fit 1/8" to 1-1/2" Flared Tube Fittings or 5/16" to 1-7/8" Tube OD's, 7.7mm ID to 46.4mm ID
- Environmentally Friendly & Economical Masking Solution
- Does Not Promote Condensation
- Withstands Up to 200° C (400° F), Ideal for Low-To-High Temp Apps
- Material: Tan Recyclable Paper May Have Minor Dimensional Variation Due to Changes in Relative Humidity



RNS, RNM Series Round Tubing Plugs

- Sizes to Fit 1/2" to 4-3/4" Standard or 10mm to 102mm Metric Tubes
- Multiple Ribs for a Secure Fit
- Heavy End Walls for Durability & Abrasion Resistance
- Material: Black Low-Density Polyethylene



SQS, SQM Series Square Tubing Plugs

- Sizes to Fit 1/2" to 6" Standard or 10mm to 120mm Metric Tubes
- Multiple Ribs for a Secure Fit
- Heavy End Walls for Durability & Abrasion Resistance
- Material: Black Low-Density Polyethylene



Friction Fit Caps & Plugs



RCS, RCM Series Rectangular Tubing Plugs

- Sizes to Fit 1/2" x 1" to 2" x 5" Standard or 20mm x 10mm to 140mm x 80mm Metric Rectangular Tubes
- Multiple Ribs for a Secure Fit
- Heavy End Walls for Durability & Abrasion Resistance
- Material: Black Low-Density Polyethylene



SMFS, SMFM Series Sheet Metal Flush Plugs

- Sizes to Fit 3/8" to 4" Standard or 8mm to 22mm Metric Holes
- Snap-in Design for an Attractive and Secure Fit
- Used on Auto Bodies, Tanks, HVAC Units, etc.
- Material: Black Low-Density Polyethylene



SMRS Series Sheet Metal Recessed Plugs

- Sizes to Fit 1/2" to 2-1/2" (12.7mm to 64.26mm) Diameter Holes
- Snap-in Design for an Attractive and Secure Fit
- Used on Auto Bodies, Tanks, HVAC Units, etc.
- Material: Black Low-Density Polyethylene



4



KTP, LMP Series Tapered Plugs for Type K, L and M Copper Tubing

- Sizes to Fit Type K Tubing 3/8" (7.7mm OD) to 3-1/8" (75.0mm OD)
Type L and M Tubing 3/8" (8.1mm OD) to 4-1/8" (99.8mm OD)
- Reinforced Cross Bracing for Secure Fit
- Features Durable Pull-Tab for Easy Removal
- Material: Red Low-Density Polyethylene



GKP Series General Purpose Plugs for Type L and M Copper Tubing

- Sizes to Fit 3/16" (2.7mm) to 3/4" (18.1mm) Type L and M Copper Tubing
- Designed for Flange to Fit Flush with Outside Wall of Tube
- Material: Red Low-Density Polyethylene



See Website for
Full Size Charts

Tapered Caps & Plugs



T Series Tapered Plug Caps

- Sizes from 3.0mm/4.6mm (.116"/.182") to 336.55mm/345.36mm (13.25"/13.26")
- Tapered Design Fits Multiple Diameters
- Dual Function Closure can be Used as a Cap or Plug
- Material: Red Low-Density Polyethylene



WF Series Wide Flange Tapered Plug Caps

- Sizes from 4.39mm/6.10mm (.173"/.240") to 49.4mm/53.34mm (1.94"/2.10")
- Featuring a Wider Flange than the T Series for Added Protection of External Surfaces
- Material: Red Low-Density Polyethylene




TWF Series Thick Wide Flange Tapered Plug Caps

- Sizes from 3.0mm/4.6mm (.116"/.182") to 167.9mm/169.8mm (6.610"/6.685")
- Thicker and Wider Flange for Added Durability
- High-Visibility Colour
- Material: Yellow Low-Density Polyethylene



XW Series Thick Extra-Wide Flange Tapered Plug Caps

- Sizes from 15.95mm/18.42mm (.628"/.725") to 67.01mm/70.99mm (2.63"/2.79")
- Featuring a Wider Flange than the TWF Series for Added Protection of External Surfaces
- Over-Sized Flanges and High-Visibility for Pre-Assembly Operation Removal
- Material: Yellow Low-Density Polyethylene

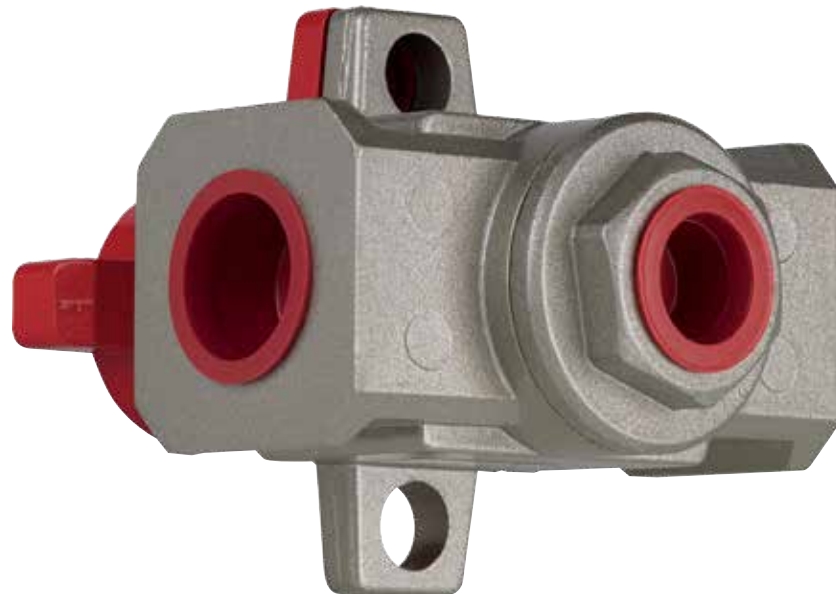

See Website for
Full Size Charts



CP Series Centre Pull Tapered Plugs

- Sizes from 3.0mm/4.6mm (.116"/.182") to 84.33mm/87.68mm (3.32"/3.45")
- Center Pull Tab Allows for Quick & Easy Removal
- Extra Strong Tab is Moulded into Plug so it Will Not Break Off
- Material: Red Low-Density Polyethylene



CPW Series Centre Pull Wide Flange Tapered Plugs

- Sizes from 12.19mm/13.72mm (.480"/.540") to 62.48mm/64.77mm (2.46"/2.55")
- Center Pull Tab Allows for Quick & Easy Removal
- Featuring a Wider Flange than the CP Series for Added Protection of External Surfaces
- Material: Red Low-Density Polyethylene




MPTP Series Paper Tapered Plugs

- Sizes from 9.0mm/10.5mm to 83.2mm/91.4mm
- Environmentally Friendly & Economical Masking Solution
- Does Not Promote Condensation
- Withstands Up to 200° C (400° F) – Ideal for Low-To-High Temp Apps
- Material: Tan Recyclable Paper May Have Minor Dimensional Variation Due to Changes in Relative Humidity



MPTC Series Paper Tapered Caps

- Sizes from 9.0mm/10.1mm to 84.2mm/92.2mm
- Environmentally Friendly & Economical Masking Solution
- Does Not Promote Condensation
- Withstands Up to 200° C (400° C) – Ideal for Low-To-High Temp Apps
- Material: Tan Recyclable Paper May Have Minor Dimensional Variation Due to Changes in Relative Humidity

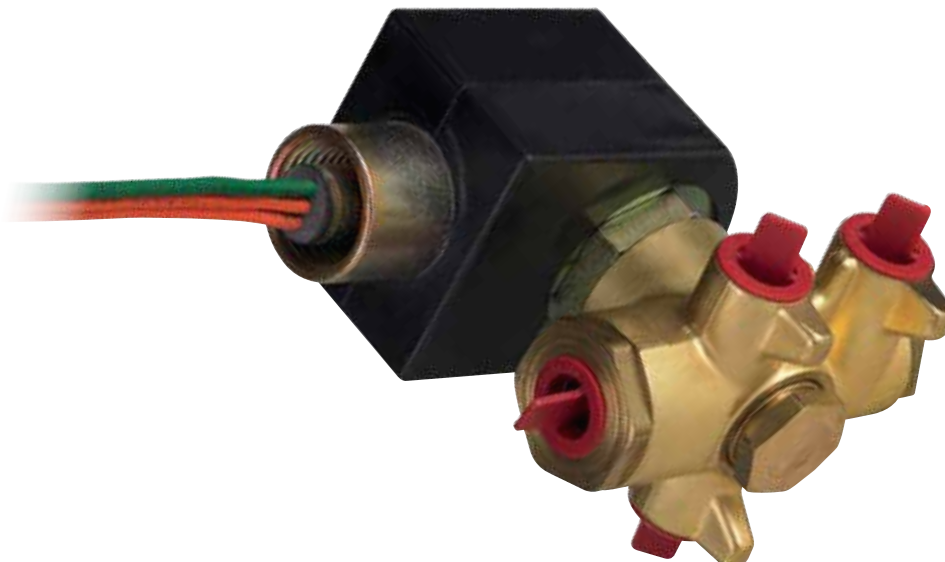

See Website for
Full Size Charts

Threaded Caps & Plugs



BGC, FJC, CMT Series *Threaded Caps*

- Sizes to Fit BSP/Gas Fittings, Metric Threads and Flared JIC Fittings
- Knurled Grip for Easy Application
- Material: Red Low-Density Polyethylene



SPU, SPM, SPB Series *Sealing Plugs*

- Sizes to Fit Unified/Straight Threads, Metric Threads and BSP Threads
- Designed with Five Complete Threads Plus an Integrated Sealing Lip for a Tight Fit
- Also Available with a Factory Fit Neoprene O-Ring when a Secure Seal is Required
- Materials: Red Polypropylene or Yellow Nylon



FJP Series *Threaded Plugs for Flared JIC Fittings*

- Sizes to Fit 5/16"-24 to 2-1/2"-12 Flared JIC Fittings for 1/8" to 2" Nominal Sized Tubes
- Designed for Flared JIC Fittings & to Seal 37° Flare Fittings without Gaskets
- Material: Red Low-Density Polyethylene



7



IFP Series *Threaded Plugs for Inverted Flared Fittings*

- Sizes to Fit 5/16"-28 to 1-1/16"-16 Inverted Flared Fittings
- Knurled Grip for Easy On-Off Application & Can be Used to Seal Boss-Type Fittings without Gaskets
- Material: Red Low-Density Polyethylene



TNP Series *Plugs for MS-21921 Flareless Tube and Nut Assemblies*

- Sizes to Fit 3/8"-24 to 1-5/16"-12 Flareless Tube & Nut Assembly
- Designed to Fit MS-21921 Tube & Nut Assemblies Interchangeably
- Knurled Grip for Easy Application & Provide a Better-Than-Normal Seal with Only Hand-Tightening
- Material: Red Low-Density Polyethylene



See Website for
Full Size Charts



Threaded Caps & Plugs



FOP Series

Threaded Plugs for Flat Faced O-Ring Fittings

- Sizes to Fit 11/16"-16 to 1-7/16"-12 Flat Faced O-Ring Fittings for 3/8" to 1" Nominal Size Tubes
- Knurled Head for Easy Use in Manual Assembly and Removal
- Material: Red Low-Density Polyethylene



GPB Series

General Purpose Plugs For BSP Threads

- Sizes to Fit BSP 1/8" to 1/2" Threads
- Designed to Protect BSP Threads and Fittings from Damage, Dust, Debris and Contaminants
- Knurled Head and Slot for Easy On-Off Application
- Material: Red Polypropylene



GPM Series

General Purpose Plugs for Metric Threads

- Sizes to Fit M12x1.5 to M22x1.5 Threads
- Designed to Protect Metric Threads and Fittings from Damage, Dust, Debris and Contaminants
- Knurled Head and Slot for Easy On-Off Application
- Material: Red Polypropylene



GPU Series

General Purpose Plugs for Unified/Straight Threads

- Sizes to Fit SAE 7/16"-20 to 1-5/8"-12 Straight Threads
- Designed to Provide a Positive Seal on SAE Straight-Thread Ports
- Features a Moulded-In O-Ring Style Bead & External Lip on the Flange to Seal Out Contaminants
- Material: Red Polypropylene



OPP Series

Threaded Plugs for Straight Thread O-Ring Ports

- Sizes to Fit 7/16"-20 to 1-5/8"-12 Straight Thread O-Ring Ports
- Provides a Positive Seal on SAE Straight-Thread O-Ring Type Ports and Mil-MS-33649 Bosses
- Features Moulded-In O-Ring Style Bead on the Outside of Head to Seal the Port Face from Oil Leakage
- Material: Red Polypropylene



See Website for
Full Size Charts

Threaded Caps & Plugs



SFPS Series

Square Head Flanged Plugs for NPT Threads

- Sizes to Fit NPT 1/8"-27 to 3/4"-14 Threads
- Flange Allows for Protection of the Outside of Port
- Designed to Protect Threads from Dirt, Dust & Moisture During Low-Pressure Testing & In-Plant Handling
- Material: Red Polypropylene



SPN Series

Square Head Plugs for NPT Threads

- Sizes to Fit NPT 1/8"-27 to 1-1/2"-11-1/2 Threads
- Designed to Protect Threads from Dirt, Dust & Moisture During Low-Pressure Testing & In-Plant Handling
- Material: Red Polypropylene



HSPN Series

Hex Socket Plugs for NPT Threads

- Sizes to Fit NPT 1/4"-18 to 1"-11-1/2 Threads
- Designed to Protect Threads from Dirt, Dust & Moisture During Low-Pressure Testing & In-Plant Handling
- Material: Red Polypropylene



9



PIP Series

Push-In Plugs for SAE & NPT Threads

- Sizes to Fit SAE 1/4" to 1-7/8" or NPT 1/8" to 1" Threads
- Designed to Simply Snap into Place to Protect Threads
- Material: Red Low-Density Polyethylene



U Series

Universal Thread Plugs

- Sizes to Fit 1/8" to 3/4" NPT, 7/16" to 1-7/16" UN, 1/8" to 1" BSP or M10 to M36 Threads
- Designed for Maximum Flexibility to Fit Many Different Thread Types & Sizes with a Simple Push-In & Turn to Lock-In-Place
- Material: Red Low-Density Polyethylene



See Website for
Full Size Charts



Pipe & Flange Protection



PC Series Pipe Caps

- Sizes to Fit 1/4" to 40" NPT, 1/8" to 40" BSP or 8 mm to 1016 mm Threads
- Designed to Protect Metric, BSP and NPT Male Pipe Threads from Damage and Contamination
- Material: Black Low-Density Polyethylene



PP Series Pipe Plugs

- Sizes to Fit 1/2" to 6" NPT, 1/2" to 6" BSP or 21.3 mm to 177.8 mm Pipe
- Designed to Protect Metric, BSP and NPT Pipe from Damage and Contamination
- Material: Black Low-Density Polyethylene



MPI Series Push-In Flange Protectors

- Sizes to Fit 1/2" to 12" Nominal Size Pipe Flanges or DN15 to DN300
- Flexible Rings Allow for Easy Installation
- Designed to Protect Flange Faces from Damage and Contamination
- Material: Yellow Low-Density Polyethylene



MOF Series Outside Fitting Flange Protectors

- Sizes to Fit 1/2" to 10" Nominal Size Pipe Flanges
- Designed to Easily Snap Over the Full Face of the Flange for Maximum Protection
- Material: Yellow Low-Density Polyethylene



MBH Series Bolt Hole Flange Protectors

- Sizes to Fit 1/2" to 12" Nominal Size Pipe Flanges
- Designed to Snap-In Easily Without Additional Fasteners
- Material: Blue or Black Low-Density Polyethylene – Stocked in One Colour, Blue or Black, per Specific Size



11

See Website for
Full Size Charts





H Series

High Temp Round Vinyl Caps

- Sizes to Fit Straight, Metric, BSP & NPT Threads and Fittings
- Withstands Up to 246°C (475°C)
- Flexible Yet Durable - Won't Split, Tear or Shred
- Material: Black Vinyl Additional Colours: ●●



P Series

High Temp Pull Tab Vinyl Caps

- Available in Diameters: 4.8mm ID to 31.8mm ID
- Withstands Up to 246°C (475°C)
- Stretches for a Snug Fit but Won't Split, Tear or Shred
- Flat / Ergonomic Tab for Easy Removal
- Material: Black Vinyl Additional Colours: ●●



OMCP Series

High Temp Vinyl Insertion Plugs

- Sizes to Fit 1/4" to 1-1/4"
- Withstands Up to 246°C (475°C)
- Wide Flange for Easy Removal
- Flexible Yet Durable - Won't Split, Tear or Shred
- Material: Black Vinyl Additional Colours: ●●



12



NTP Series

High Temp Vinyl Tapered Plugs

- Withstands Up to 246°C (475°C)
- Sizes to Fit 6-32 to 3/8"-16 Standard or M4 to M10 Metric Threads
- Wide Flange for Easy Removal
- Flexible Yet Durable - Won't Split, Tear or Shred
- Material: Black Vinyl Additional Colours: ●●



*Looking for Additional Low Temperature Masking Products?
Consider Our A, D or MPSC Series Caps or CP, CMCP or MPTP Series Plugs*

Masking



RMSC Series Silicone Straight Caps

- Sizes to Fit 1.8mm to 50.8mm (.070" to 2")
- Resists Temps to 316° C (600° F)
- Flexible for Masking Threaded and Smooth Studs
- Material: Iron Oxide Orange Silicone



SMSP Series Silicone Tapered Plugs

- Sizes to Fit 1.6mm to 127.0mm (.062" to 5.00")
- Resists Temps to 316° C (600° F)
- Larger Sizes also Available with a Hollow End for Cost Savings - SMSHP Series
- Tapered Design allows for Masking of Various Hole Diameters
- Material: Iron Oxide Orange Silicone



SMPP Series Silicone Pull Plugs

- Sizes to Fit 2.8mm to 11.3mm (.109" to .445")
- Resists Temps to 316° C (600° F)
- Convenient Handle and Parallel Design for Masking of Through-Holes
- Material: Iron Oxide Orange Silicone



13



SMFP Series Silicone Washer Plugs

- Sizes to Fit 1.5mm to 5.5mm (.060" to .417")
- Resists Temps to 316° C (600° F)
- Features a Flange for Masking the Area Around a Hole
- Material: Iron Oxide Orange Silicone



ST Series Silicone Rubber Tubing

- Sizes to Fit 2mm to 25mm
- Stocked in 25 Metre Lengths
- Resists Temperatures to 260° C (500° F)
- Material: Iron Oxide Orange Silicone



See Website for
Full Size Charts





KMRC Series *EPDM Straight Caps*

- Sizes to Fit 1.8mm to 50.8mm (.070" to 2")
- Resists Chemicals and Temps to 149°C (300°F)
- Flexible for Masking Threaded and Smooth Studs
- Material: Black EPDM Rubber



KMRP Series *EPDM Tapered Plugs*

- Sizes to Fit 1.6mm to 127.0mm (.062" to 5.00")
- Resists Chemicals and Temps to 149°C (300°F)
- Tapered Design Allows for Masking of Various Hole Diameters
- Material: Black EPDM Rubber



KMPP Series *EPDM Pull Plugs*

- Sizes to Fit 2.8mm to 11.3mm (.109" to .445")
- Resists Chemicals and Temps to 149°C (300°F)
- Convenient Handle and Parallel Design for Masking of Through-Holes
- Material: Black EPDM Rubber



14




KMFP Series *EPDM Washer Plugs*

- Sizes to Fit 1.5mm to 5.5mm (.060" to .417")
- Resists Chemicals and Temps to 149°C (300°F)
- Features a Flange for Masking the Area Around a Hole
- Material: Black EPDM Rubber




*See Website for
Full Size Charts*

Masking

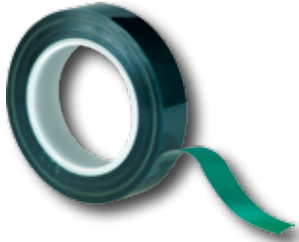

X210L Series *Polyester Tape*

- Widths from 6mm to 450mm
- Withstands Up to 218° C (425°F) for 1 hour
- Adhesive Leaves No Residue after Removal
- Material: Green Polyester

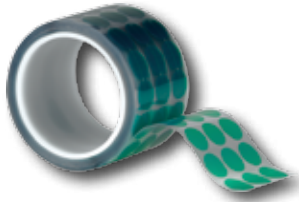


W210L Series *Polyester Discs*

- Diameters from 4mm to 150mm
- Withstands Up to 218° C (425°F) for 1 hour
- Split Backing on 9.5mm and Larger Saves Labour Time
- Adhesive Leaves No Residue after Removal
- Material: Green Polyester




X260K Series *Polyimide Tape*

- Widths from 6mm to 450mm
- Withstands Up to 260° C (500°F) for 1 hour
- Adhesive Leaves No Residue after Removal
- Material: Amber Polyimide

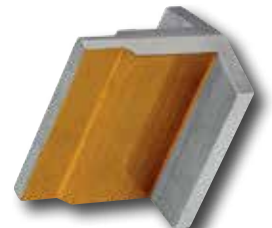

15

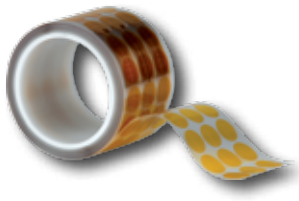


W260K Series *Polyimide Discs*

- Diameters from 4mm to 150mm
- Withstands Up to 260° C (500°F) for 1 hour
- Split Backing on 9.5mm and Larger Saves Labour Time
- Adhesive Leaves No Residue after Removal
- Material: Amber Polyimide



See Website for
Full Size Charts

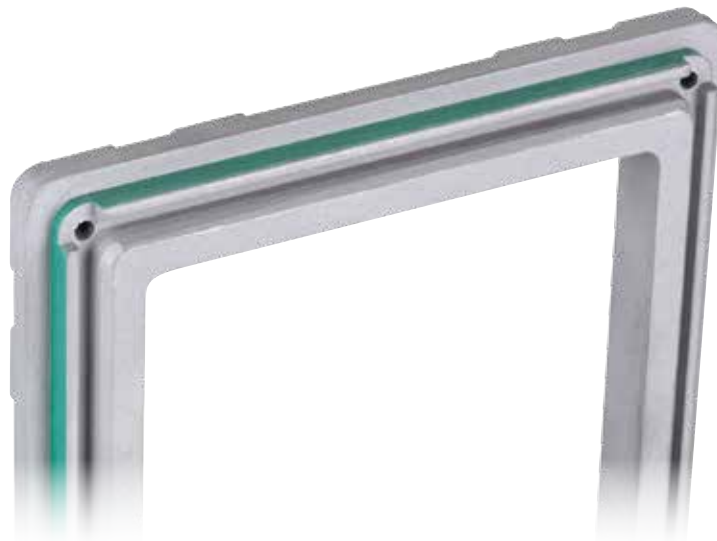




TPE-X Series

Silicone Self-Fusing Tape


- No Adhesive, Therefore No Residue when Removed
- Conforms to Shape to Create an Air and Water Tight Seal
- Resists Temps +260° C (500°F) to -50° C (-60°F)
- Material: Silicone in 10 Colours
- Visit: <http://uk.XTremeTape.eu> for Additional Information



MCN Series

Plastic Netting for Superior Protection

- Sizes from 6.4mm (1/4") to 304.8mm (12")
- Open Design Prevents Corrosion
- Flexible to Fit Irregular Shapes
- Sold in Rolls, but can be Sliced to Length
- Material: Low-Density Polyethylene in Specific Colours per Size

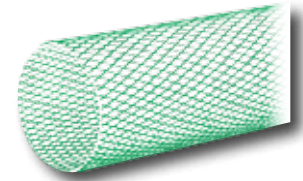

Clartec Packaging

PETG Plastic Tubes

- Available with a Sealed Bottom or Built-In Hanger
- Various Thicknesses and Closures Available
- Printing and Label Application Services
- Material: Clear PETG Please call for info on other colours
- Visit: www.ClartecPackaging.co.uk for Additional Information



16



Secondary Operations

Customised to Fit Your Specifications

- Printing
- Punching & Slicing
- Assembly



See Website for Full Size Charts

International Offices:

MOCAP United Kingdom
Hortonwood 35
Telford, Shropshire TF1 7YW
Great Britain
Tel: +44 1952 670247
Fax: +44 1952 670241
www.mocap.co.uk
sales@mocap.co.uk
(Sales & Manufacturing Location)



MOCAP France
Tel: +33 182 88 58 31
Fax: +33 176 75 33 34
www.mocap-france.com
info@mocap.france.com

MOCAP Germany
Tel: +49 231 4461693
Fax: +49 231 4461694
www.mocap-deutschland.de
info@mocap-deutschland.de

MOCAP Italy
Tel: +39 035 0460169
Fax: +39 035 0460170
www.mocap.it
info@mocap-it

MOCAP China 茂凯
3 Industry Avenue North
Xiaolan Town • Zhongshan
Guangdong, China 528415
Tel: +86 760-22836188
Fax: +86 760-22836177
www.mocap.com.cn
sales@mocap.com.cn
(Sales & Manufacturing Location)



MOCAP Mexico
Serafín Peña 745 Sur
Monterrey, NL 64000
México
Tel: +52 (81) 8344-1843
Fax: + 52 (81) 8340-0984
www.mocap.com.mx
ventas@mocap.com

MOCAP Canada
Tel: 800.633.6775
Fax: 314.543.4111
en.mocap-canada.com (English)
fr.mocap-canada.com (French)
sales@mocap.com

World Headquarters:

MOCAP
409 Parkway Drive
Park Hills, MO 63601 • USA
314.543.4000
314.543.4111 (fax)
(Sales & 2 Manufacturing Locations in Missouri)



www.mocap.com
800.633.6775
sales@mocap.com
customerservice@mocap.com

MOCAP Park Hills, MO
Self-Certified to ISO 14001

MOCAP Farmington, MO
Self-Certified to ISO 14001



FAST LINK to our Website

